



LG X Power Screen Replacement

This guide will show you how to replace the LCD...

Written By: khaled Albannaw



INTRODUCTION

This guide will show you how to replace the LCD screen on a LG X Power smartphone.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tool](#) (1)
 - [Spudger](#) (1)
-

Step 1 — LG X Power Disassembly



- Insert a plastic opening tool above the AUX jack and slide it around the perimeter to pop the back cover off.

Step 2




- Remove the twelve 2.5mm Phillips #0 screws from the back of the phone.

Step 3




- Insert a plastic opening tool underneath the mid-frame and pry upwards until you hear a click.
- With the plastic opening tool still underneath the mid-frame, work your way around the perimeter until it's free from the smartphone.

Step 4 — Battery

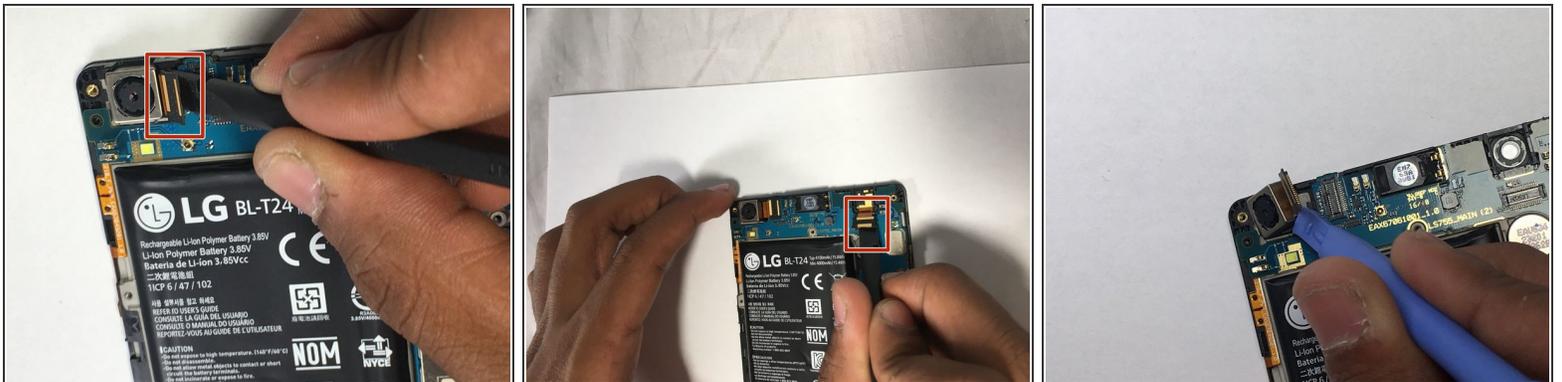


- Use the flat end of a spudger to disconnect the front and rear cameras from the motherboard.
- Pull the cameras out to remove them.

Step 5

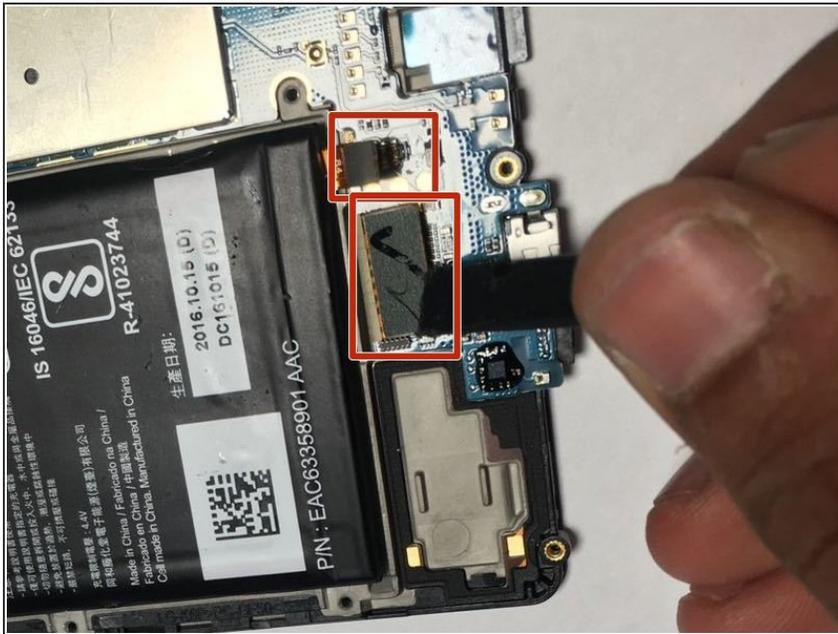

- Use the flat end of a spudger to disconnect the battery from the motherboard.
- ⓘ You will not be removing anything, just disconnecting.

Step 6

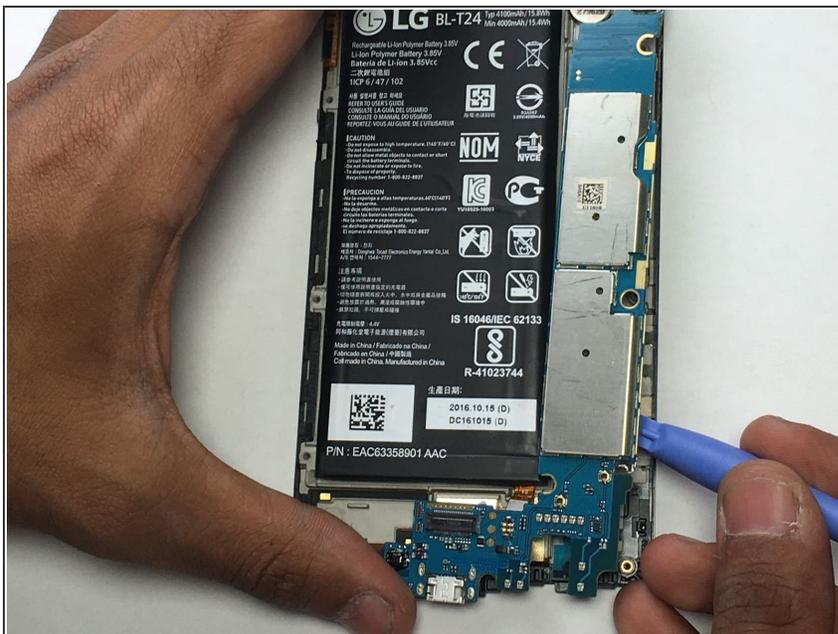

- Insert a plastic opening tool underneath the motherboard and pry upwards to remove it.



Step 7



- Use a spudger and plastic opening tool to carefully pry up the battery.


⚠ There is a strong adhesive on the back of the battery that will make it difficult to remove.

Step 8 — Screen

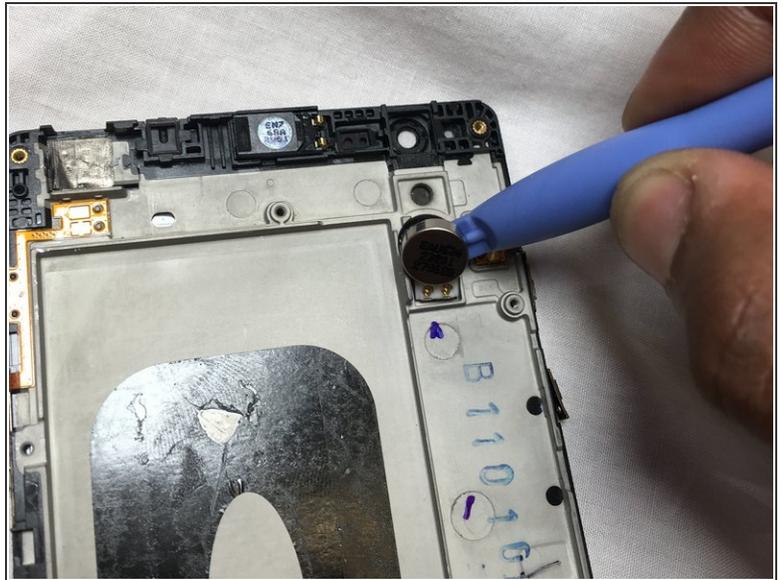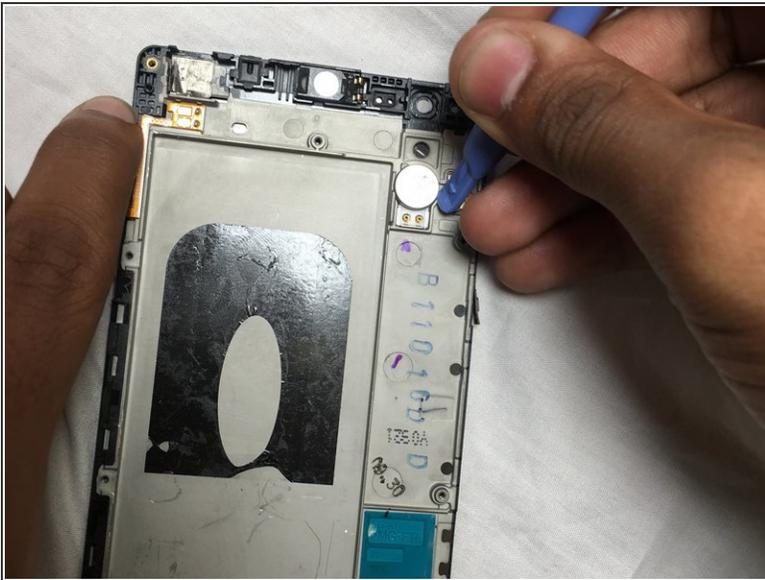

- Carefully peel off the glued vibration motor by using the plastic opening tool.

Step 9

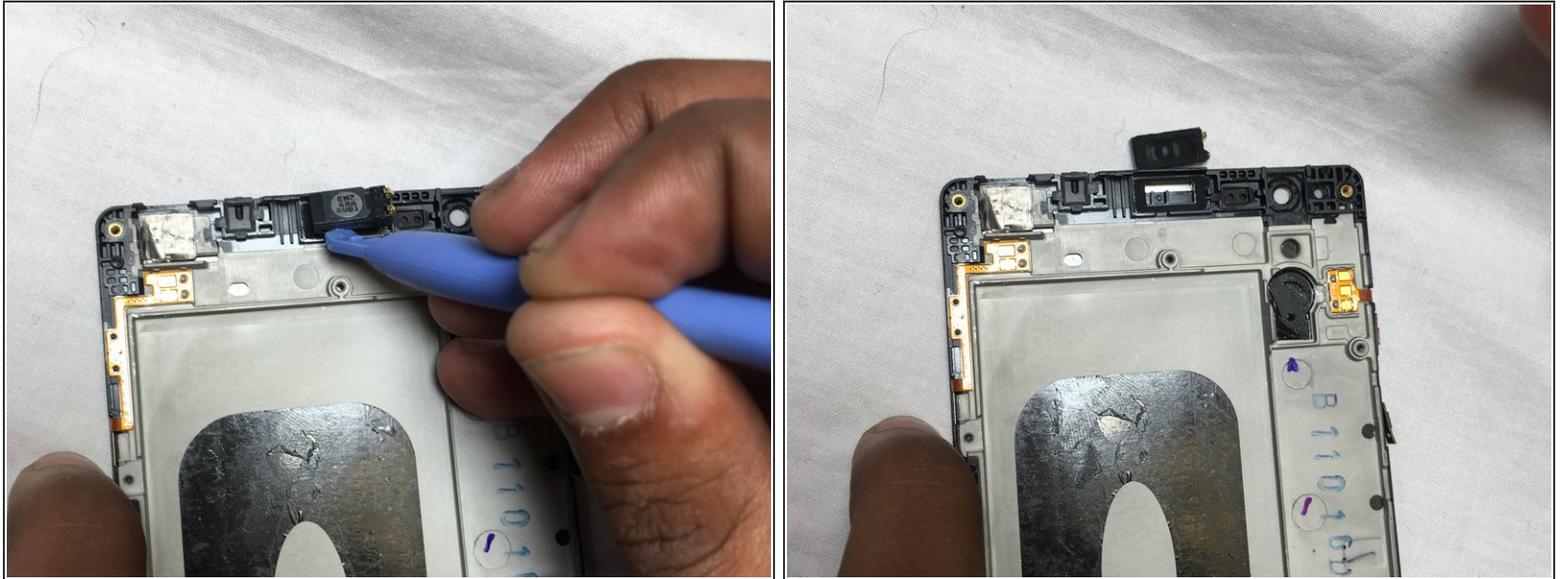

- Using the plastic opening tool, pry off the ear speaker.

To reassemble your device, follow these instructions in reverse order.