




Dell VRP100 Auxiliary Cord Replacement

This replacement guide will show you how to...

Written By: Chris Grabow

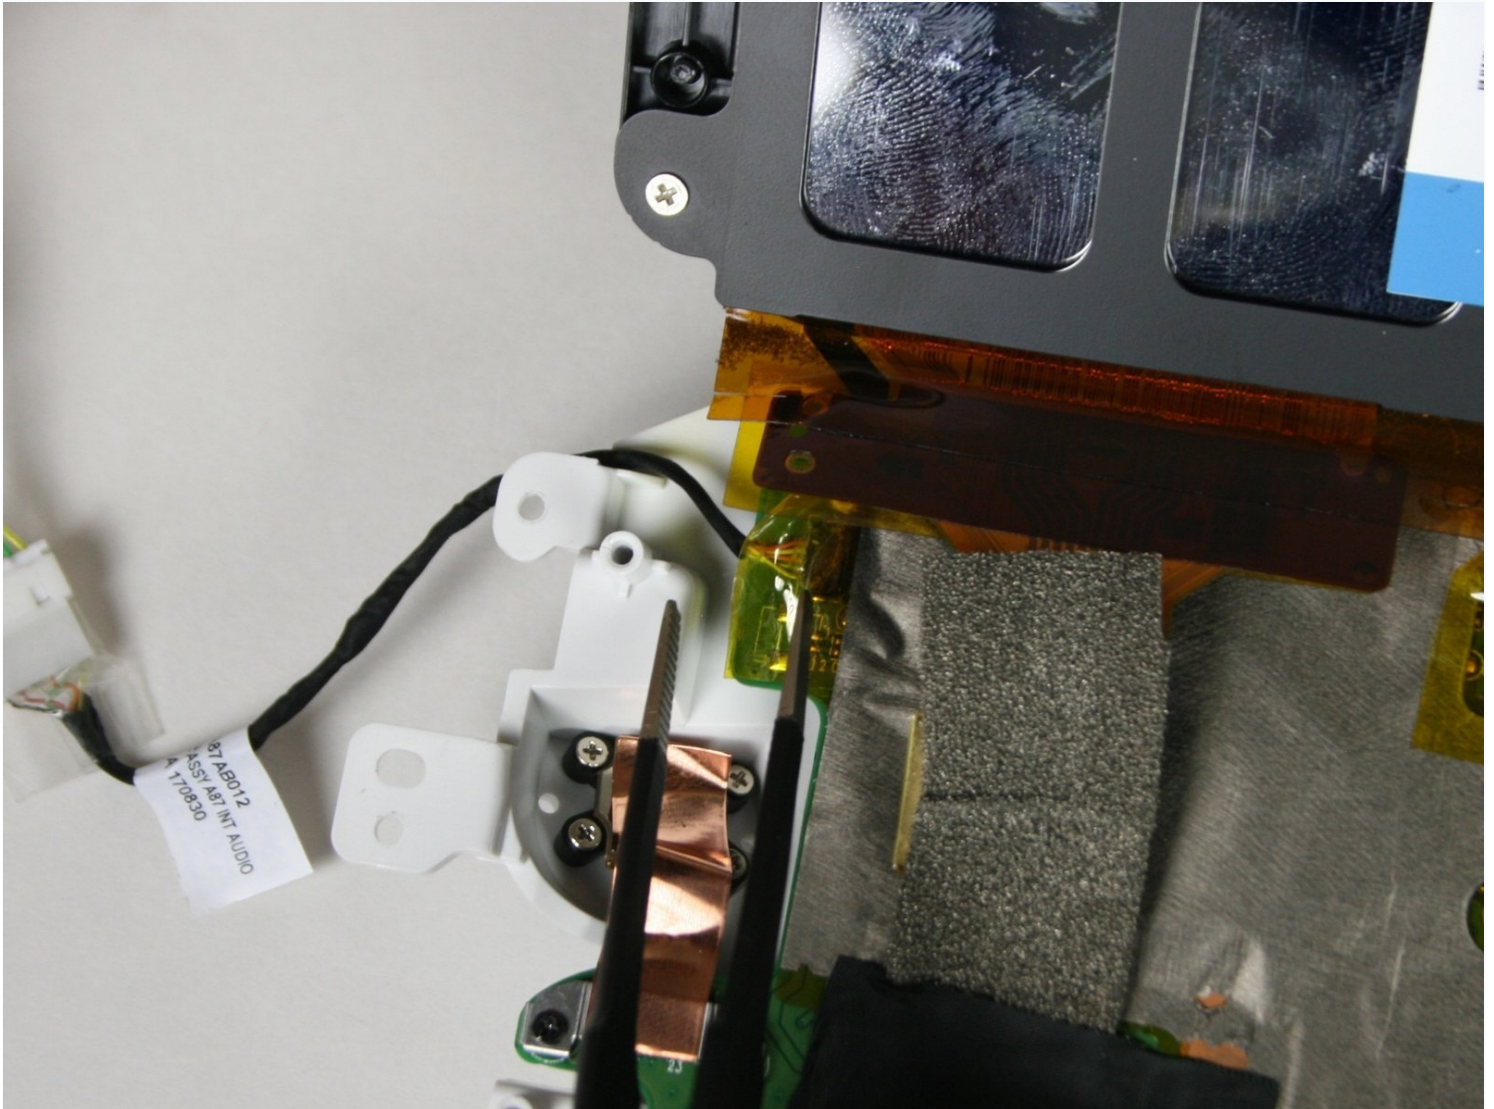

INTRODUCTION

This replacement guide will show you how to replace the auxiliary (aux) cord on your Dell VRP100 headset. Most audio-related issues will stem from the aux cord so it is important to replace it to ensure the highest audio quality.


TOOLS:

[Phillips #000 Screwdriver](#) (1)

[iFixit Opening Tool](#) (1)


[Spudger](#) (1)

Step 1 — Cover Panel

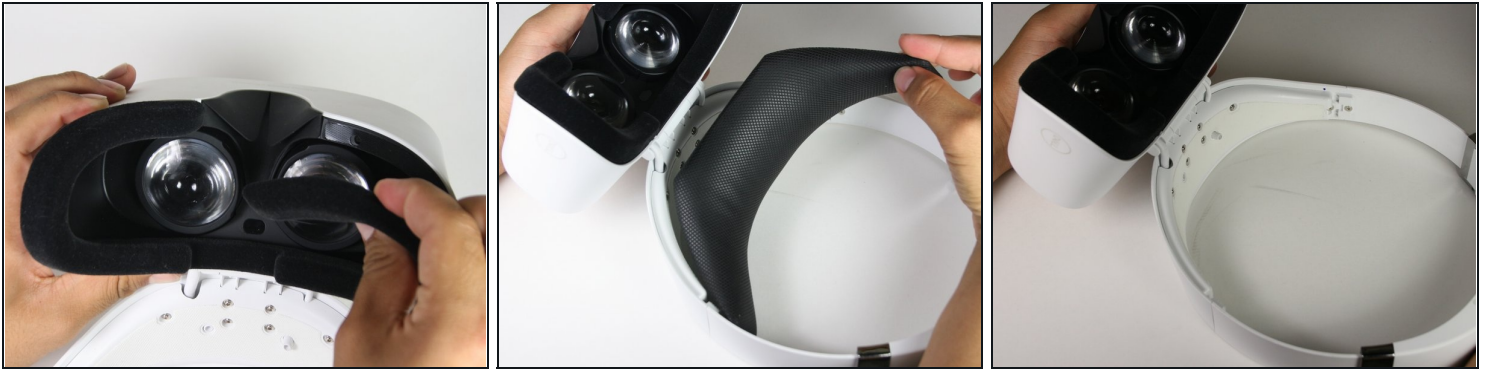

- Remove the black foam padding by peeling away slowly.
- Remove the front and back padding from the headset by peeling away slowly.

Step 2

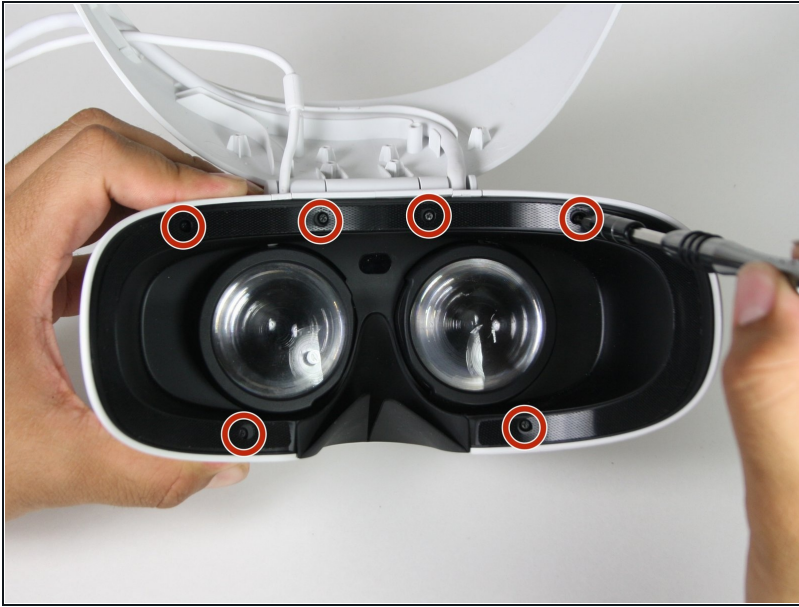

- Remove the six 5.5mm PH000 screws from the cover by rotating counter-clockwise.
- ☑ Cover panel may need to be pushed in before inserting screws.

Step 3






- Remove the cover using one of the plastic opening tools, and then carefully pull it from the casing.

Step 4



- Remove the six 5.5mm PH000 screws from the cover by rotating counter-clockwise.
- Carefully remove the lens and motherboard assembly from the white casing.

Step 5 — Auxiliary Cord

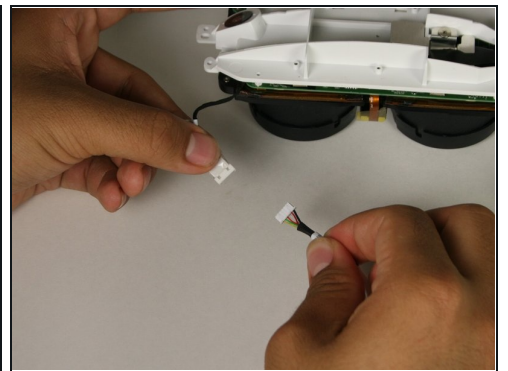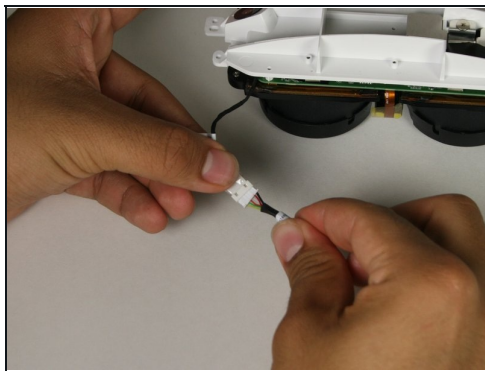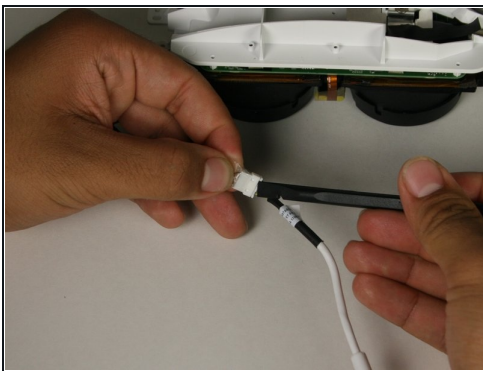


- Separate the external connector of the auxiliary cord.
- ⓘ A spudger may be needed to separate the connector.

Step 6



- Remove the four 2.5mm PH000 screws by rotating counter-clockwise.
- Separate the lens housing from the motherboard panel.

Step 7

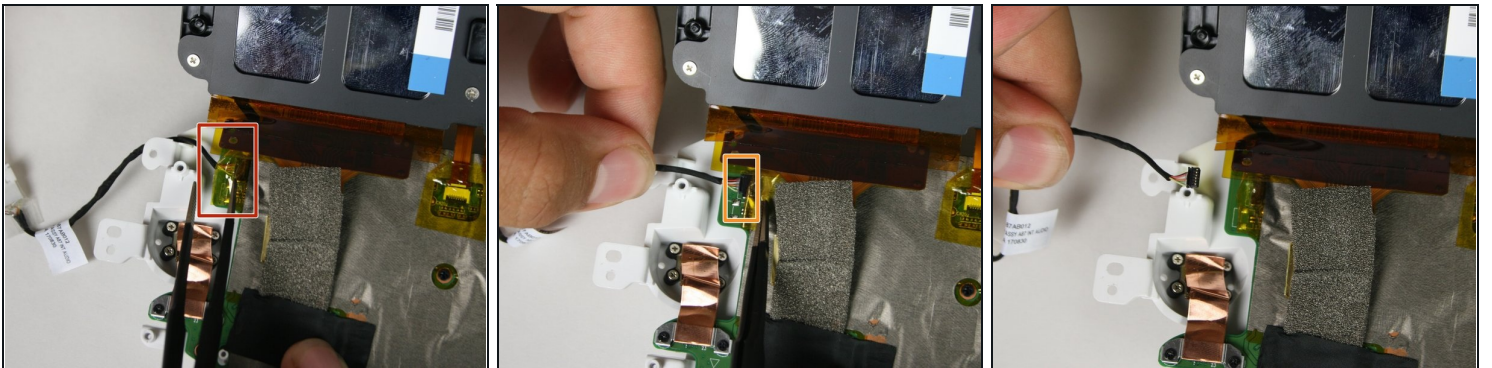

- In the top right corner of the motherboard panel, peel back the yellow tape covering the bundled auxiliary cable connector using [tweezers](#).
- Carefully pull out the bundled cable connectors.

To reassemble your device, follow these instructions in reverse order.