



Samsung Galaxy A10e Back Cover Replacement

Written By: Thomas Boland



INTRODUCTION

Use this guide to remove or replace a damaged back cover on your Galaxy A10.



TOOLS:


- [SIM Card Eject Tool](#) (1)
- [1 x Opening Picks](#) (1)



PARTS:

- [Galaxy A10e SIM Card Tray](#) (1)
- [Galaxy A10e Rear Cover](#) (1)

Step 1 — SIM Card

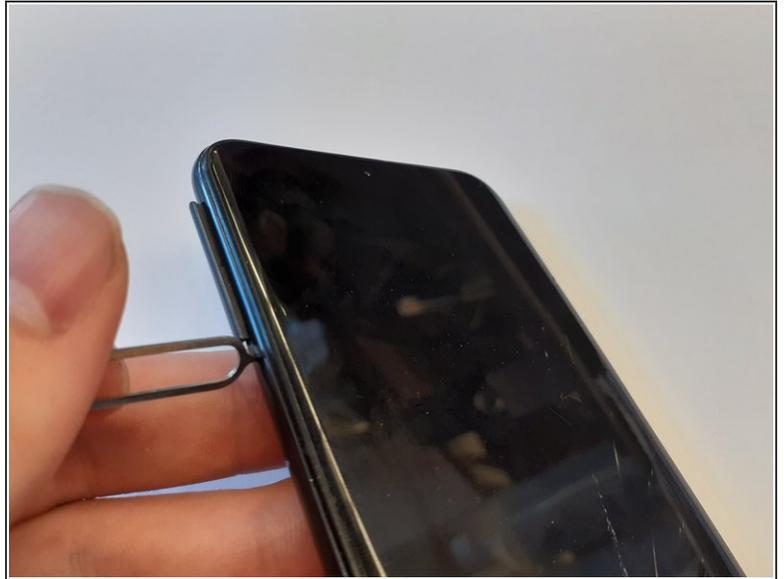

- Insert a SIM card eject tool, bit, or a straightened paperclip into the small hole in the SIM card tray.
- Press to eject the tray.

Step 2




- Remove the SIM card tray from the phone.
 - ⓘ The SIM card(s) and SD card will fall out of the tray easily.
- ☑ When reinserting the tray, ensure the SIM card and SD card are in the correct slots and oriented correctly.
- ☑ For dual-SIM versions of this phone, there may be two SIM cards. Ensure the SIM cards are placed in the slots corresponding to the correct phone lines.

Step 3 — Back Cover




- ⓘ The back cover is held in place by plastic clips.
- Insert an opening pick between the screen and the back cover on the bottom of the phone where the charging port is located.

Step 4

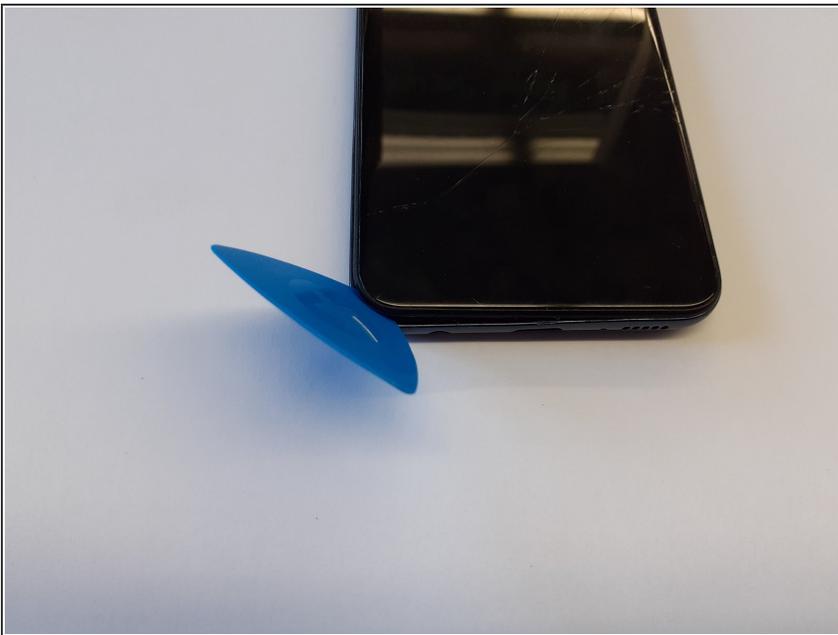

- Slide the opening pick to the bottom left corner to release the clips.

Step 5

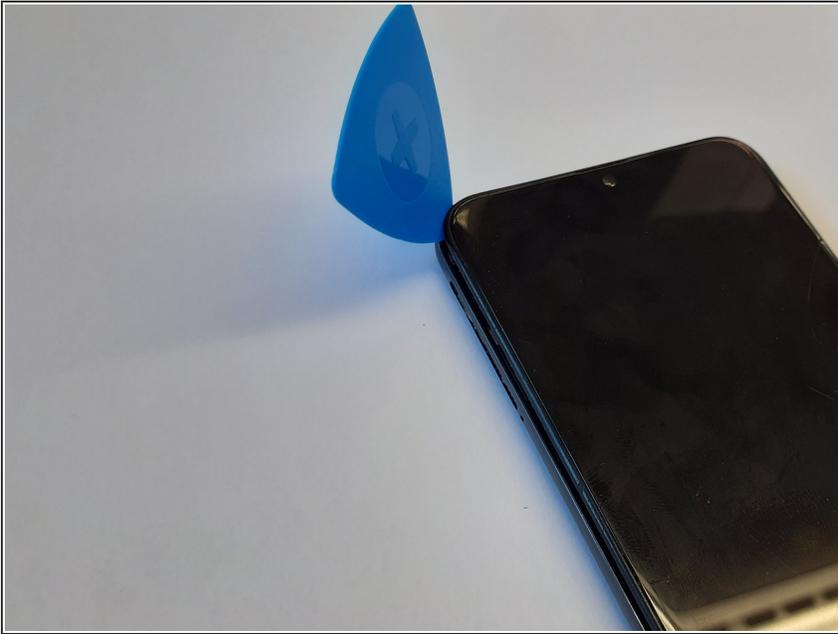

- Slide the opening pick along the left edge to the top left corner of the phone, to release the clips.

Step 6



- Slide the opening pick from the top left corner to the top right corner to release the plastic clips.

Step 7



- Slide the opening pick from the top right corner to the bottom right corner to release the remaining clips.

Step 8



- Remove the back cover.

To reassemble your device, follow these instructions in reverse order.