



iPad 3G Metal Display Clips Replacement

Replace broken metal display clips on your iPad 3G's front panel assembly.

Written By: Andrew Bookholt



INTRODUCTION

Use this guide to replace the small metal clips that are likely to break during removal of the display assembly.

TOOLS:

- [Metal Spudger](#) (1)
- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

PARTS:

- [iPad Display Clip Set](#) (1)
 - [iPad Display Clip](#) (1)
-

Step 1 — Display Assembly



- If your display glass is cracked, keep further breakage contained and prevent bodily harm during your repair by taping the glass.
- Lay overlapping strips of clear packing tape over the iPad's display until the whole face is covered.
 - ⓘ This will keep glass shards contained and provide structural integrity when prying and lifting the display.
- Do your best to follow the rest of the guide as described. However, once the glass is broken, it will likely continue to crack as you work, and you may need to use a metal prying tool to scoop the glass out.

 Wear safety glasses to protect your eyes, and be careful not to damage the LCD screen.

Step 2



- i** The iPad shown in the photos may look slightly different from your iPad, but the procedure is the same.
- Insert a metal spudger between the right edge of the display assembly and the rear panel assembly.
 - Rotate the spudger away from you to release the tabs along the top edge of the display.

Step 3



- Insert a second metal spudger between the top edge of the display assembly and the rear panel assembly to keep the tabs from snapping back into place.
- Pry the display assembly away from the rear panel.

Step 4



- Continue prying the display assembly away from the rear panel along the bottom and left edges of the iPad.

! Use extreme caution as you approach the top edge of the iPad. The digitizer ribbon cable is located near the edge of the rear panel and can easily be damaged.

Step 5




- Lift the display assembly away from the rear panel assembly by its bottom edge.
- !** Do not excessively lift the display assembly off the rest of the iPad, as a fragile antenna cable with very little slack still connects the two components.

Step 6



- Use the flat end of a spudger to pry the antenna connector closest to the bottom of the iPad up off its socket on the communications board.

Step 7

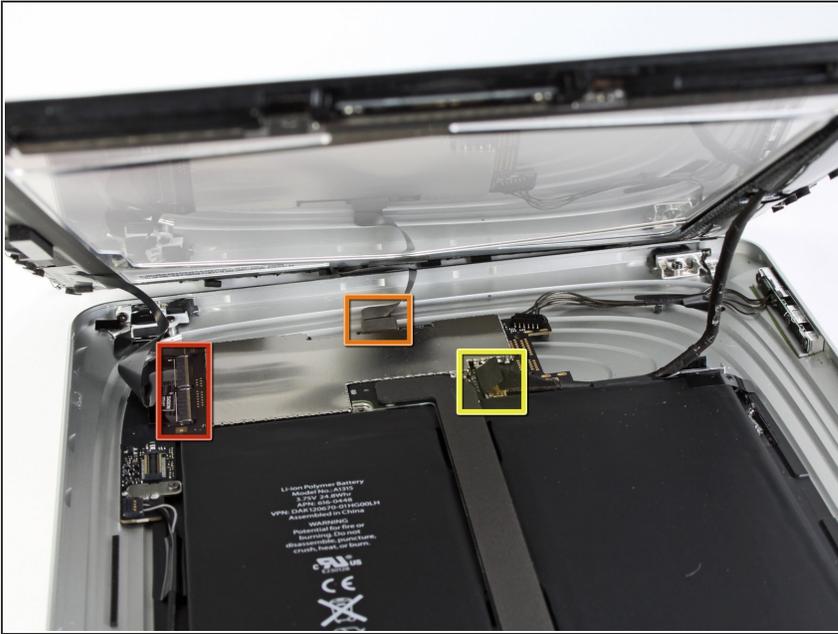

- In the following steps, you will disconnect the three cables attaching the display assembly to the logic board. The cables are for the following components:
 - Digitizer
 - Ambient Light Sensor
 - Display Data Cable

Step 8





- Use the edge of an iPod opening tool to flip up the retaining flaps holding the digitizer ribbon cables in their sockets on the logic board.
- ⚠ Be sure you are flipping up the retaining flap, **not** the socket itself.
- Pull the digitizer ribbon cables straight out of their sockets.

Step 9



- Use an iPod opening tool to remove the ambient light sensor connector from its socket by gently prying upward.


Step 10

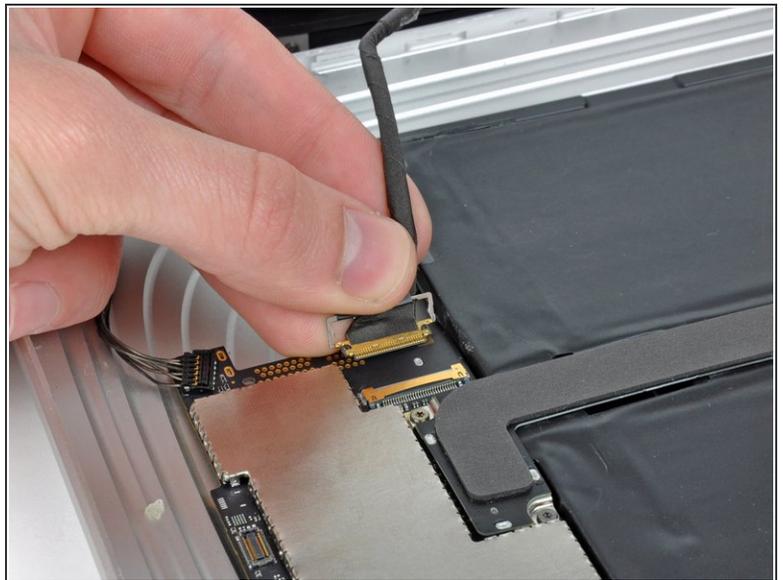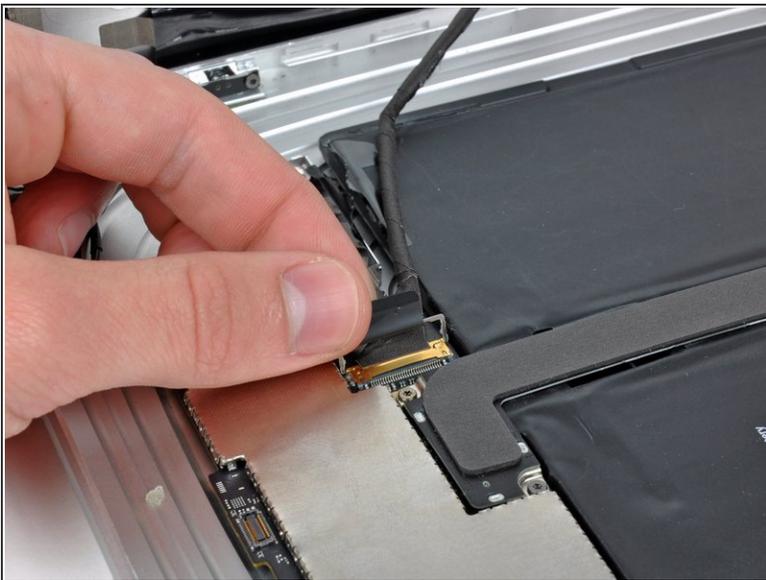

- Disconnect the display data cable from the main board by flipping up the metal retainer by its black plastic pull tab.
- Pull the cable connector away from its socket.
- **i** Pull the connector parallel to the face of the logic board.

This document was generated on 2020-11-28 01:53:09 AM (MST).

Step 11

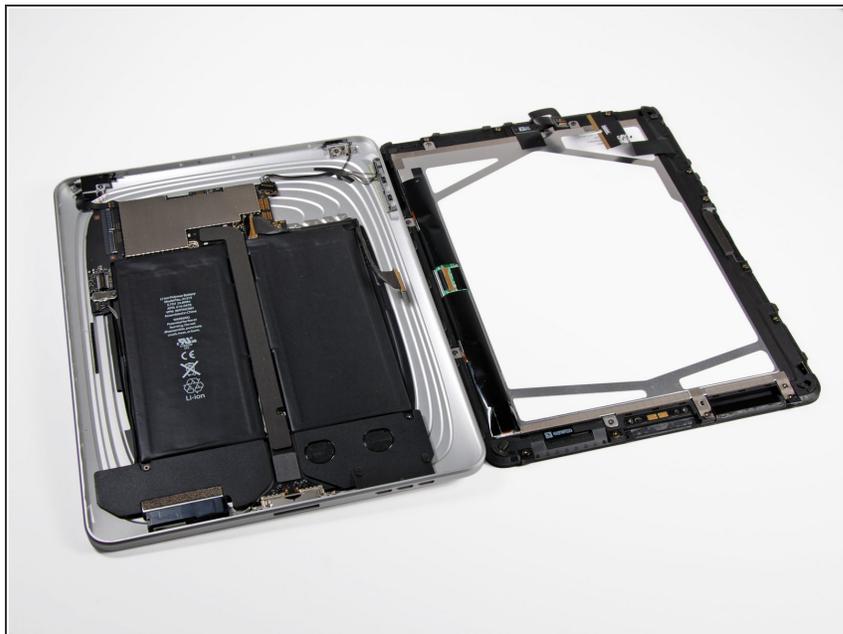

- Remove the display assembly from the rear panel assembly.

Step 12 — Metal Display Clips



- During the display assembly removal process, it is highly likely that the metal clips around the perimeter of the display assembly will break.
 - To replace a broken clip, first remove the T5 Torx screw securing the broken base of the clip to the display assembly.
 - Place a new clip on the positioning pins molded into the display frame, and reinstall the T5 Torx screw to secure the two pieces together.
- i** Repeat this process for any other broken clips around your display assembly.

To reassemble your device, follow these instructions in reverse order.