



Nokia Lumia 625 Touch Screen Digitizer Glass Replacement

Nokia Lumia 625 Touch Screen Digitizer Glass Replacement

Written By: ZFix



INTRODUCTION

How to disassemble the Nokia Lumia 625 and change broken Touch screen Glass.


[video: <https://www.youtube.com/watch?v=y9lCxpHLuo0>]



TOOLS:

- [iFixit Opening Picks set of 6](#) (1)
 - [T4 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
 - [Utility Knife](#) (1)
 - [Heat Gun](#) (1)
-

Step 1 — Rear Bezel

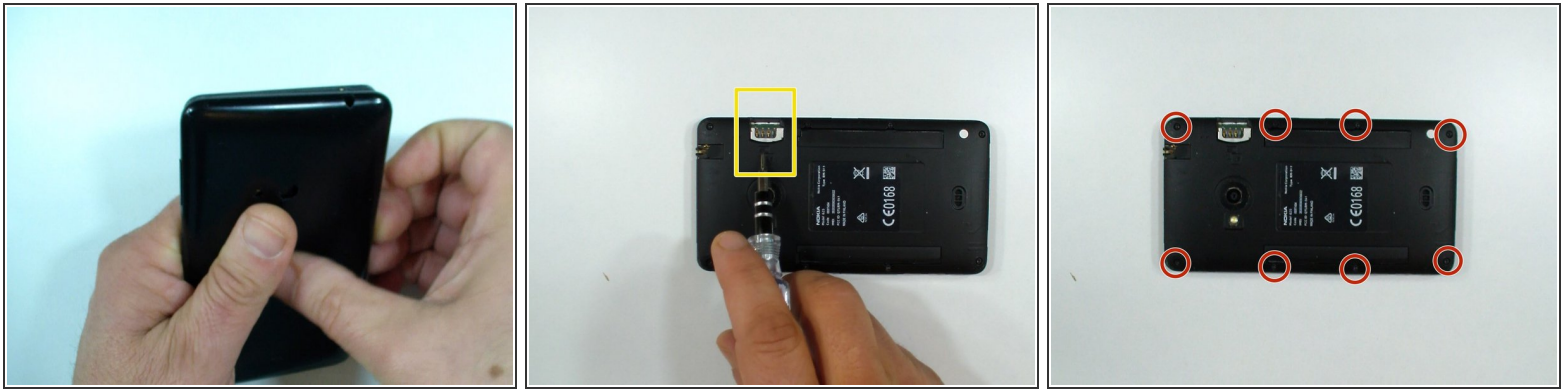


- Turn off the phone and remove the back cover.
- Remove any installed SIM or memory card.
- Use a screwdriver Torx T5 and remove the 8x black screws.

Step 2



- At the top and bottom of the phone you'll see two grooves.
- Use a plastic tool and start the separating the rear bezel from here.

Step 3 — Touch Screen Digitizer Glass

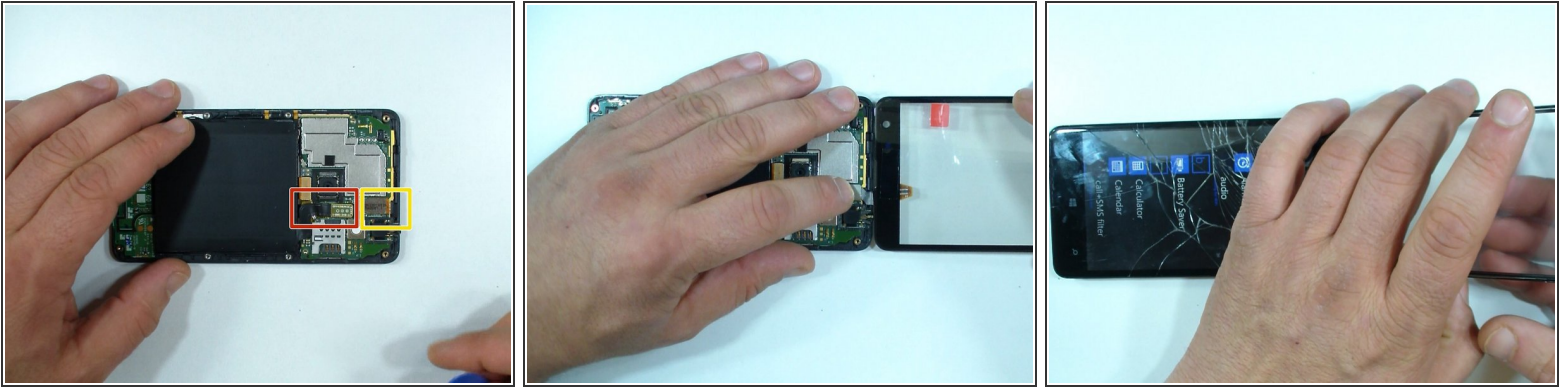



- Disconnect the battery and the touch screen flex cables.
- Now is the moment for test the new spare part.
- Finally, disconnect the battery again and remove the new touch screen.

Step 4



- Put some scotch tape to prevent the glass from shattering and yourself from injury.
- Use a hair dryer and warm the glass to make adhesive soften.


Step 5

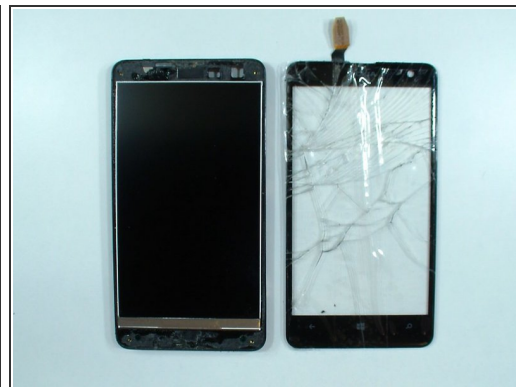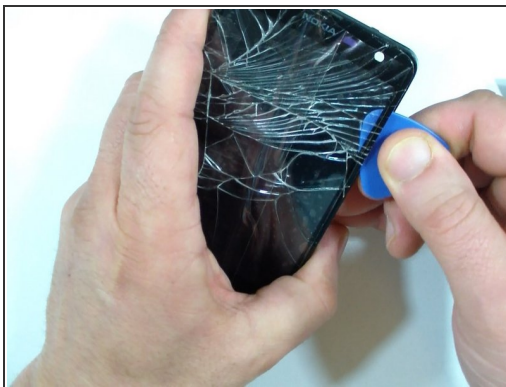

- With a cutter separate the glass a little bit to make a room for the plastic pick or other plastic tool.


⚠ Be careful for the LCD. You can use a hair dryer again to rewarm the glass.

Step 6

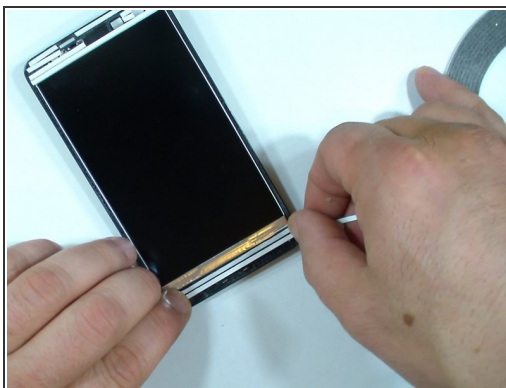

- Clean the frame of the old adhesive tape and install new.

Step 7

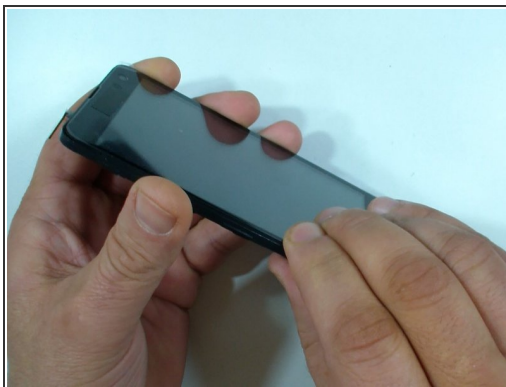

- Check the LCD for dust and install the new touch screen glass.
- Now reassemble the phone.

To reassemble your device, follow these instructions in reverse order.